

Neata[®]

+ Super energy

High Power series

NTH12-7 (12V28W)

Nominal Voltage	12V
Number of cell	6
Design Life	10years
Nominal Capacity 77°F(25°C)	
15 min wattage @1.67VPC	28W/cell
Nominal Operating Temperature Range	25±5°C
Internal Resistance	
Fully Charged battery 77°F(25°C)	≤25 mOhms
Self-Discharge	
3% of capacity declined per month at 20°C(average)	
Operating Temperature Range	
Discharge	-20~60°C
Charge	-10~50°C
Storage	-10~55°C
Max. Discharge Current 77°F(25°C)	140A(3s)
Charge Methods: Constant Voltage Charge 77°F(25°C)	
Cycle use	2.40-2.45VPC
Maximum charging current	2.8A
Temperature compensation	-30mV/°C
Standby use	2.23-2.30VPC
Temperature compensation	-20mV/°C



Wide Range Temperature



Warranty



Maintenance Free



High Power Design



easy use




long life

Mechanical Characteristics

Length(mm / inch)	151 / 5.94
Width(mm / inch)	65 / 2.56
Height(mm / inch)	94 / 3.70
Total Height(mm / inch)	100 / 3.94
Approx. Weight(Kg / lbs)	2.2 / 4.84

* Weight deviation: ± 5%

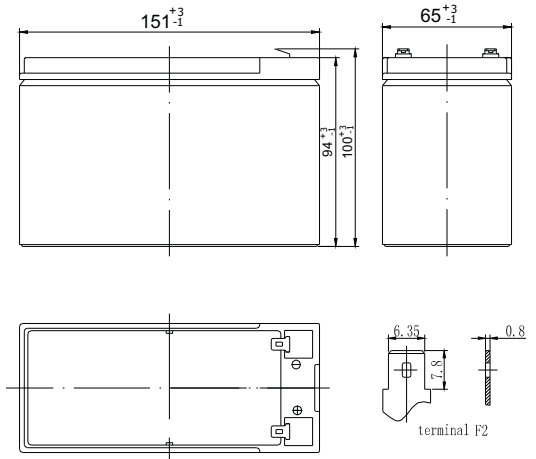

Technical Characteristics

Discharge Constant Current (Amperes at 77°F25°C)

End Point	Volts/Cell	2min	5min	10min	15min	30min	60min
1.60V	50.2	27.2	18.5	15.2	7.90	4.51	
1.65V	48.5	27.0	18.2	14.5	7.85	4.48	
1.70V	46.4	25.1	17.4	14.0	7.71	4.43	
1.75V	45.9	23.7	16.8	13.5	7.45	4.40	
1.80V	43.5	22.5	16.0	13.1	7.32	4.36	

Discharge Constant Power (Watts at 77°F25°C)

End Point	Volts/Cell	2min	5min	10min	15min	30min	60min
1.60V	93.5	54.2	36.4	29.2	15.4	8.73	
1.67V	92.0	53.7	35.2	28.0	15.3	8.71	
1.70V	88.4	49.5	32.1	26.6	15.2	8.67	
1.75V	86.7	35.4	31.0	26.3	14.5	8.65	
1.80V	83.4	31.2	30.2	25.5	14.0	8.57	

(Note)The above characteristics data are average values obtained within three charge/discharge cycles. All data shall be changed without notice, Neata reserves the right to explain and update the information.

SHENZHEN OFFICE (CHINA)
Tel: +86-755-2691-9474
Fax: +86-755-2691-9474

Recognized under CE/IEC and certified by ISO9001,14001




Neata //Shenzhen Neata Power Tech co.,Ltd//www.neata-batt.com

Neata[®] High Power series


NTH12-7 (12V28W)

+ Super energy


Discharge Characteristics Curve

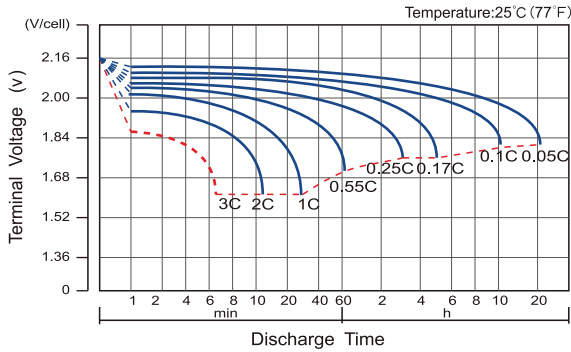


Charge Characteristic Curve For Standby Use

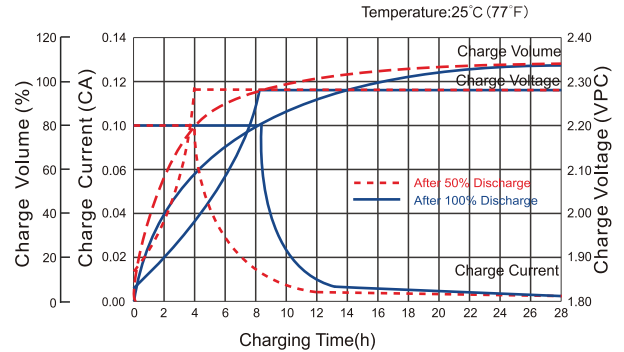


Cycle Life In Relation To Depth Of Discharge

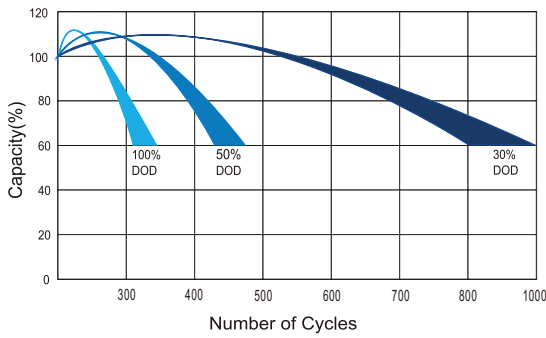


Temperature Effects On Capacity

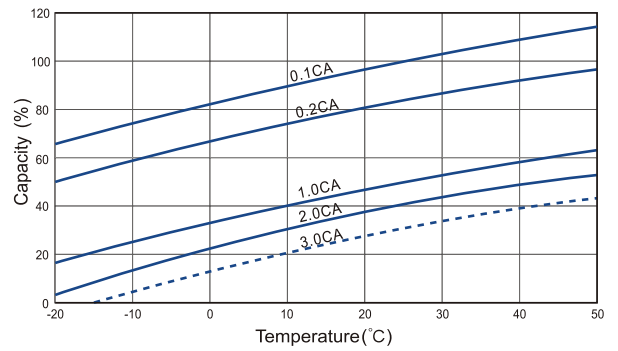


Relationship Between Charging Voltage And Temperature

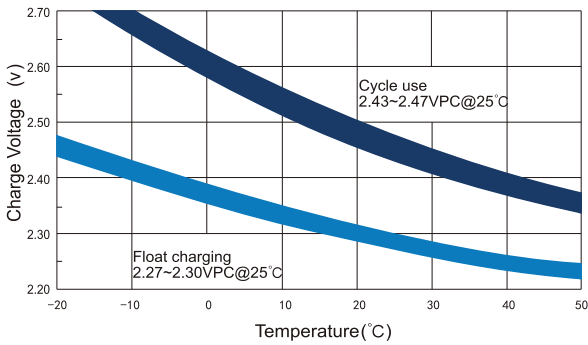


Storage Characteristics

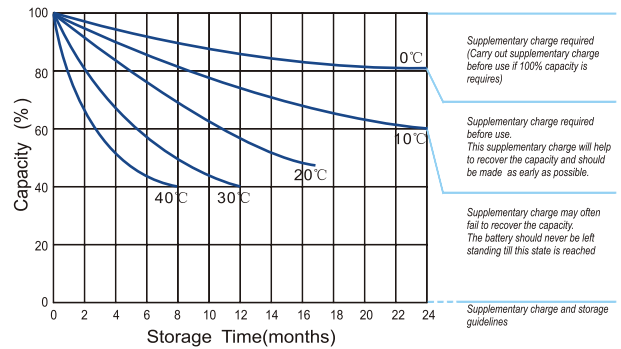

Effect Of Temperature On Long Term Life

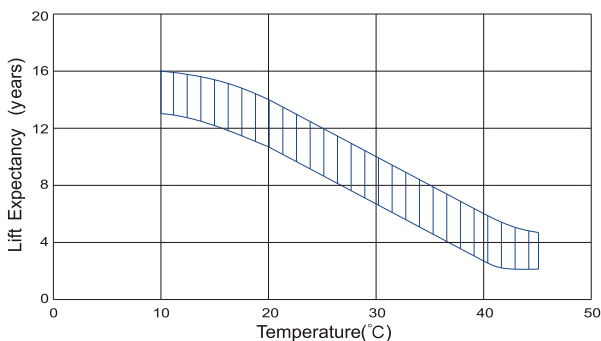

Life Characteristics Of Standby Use

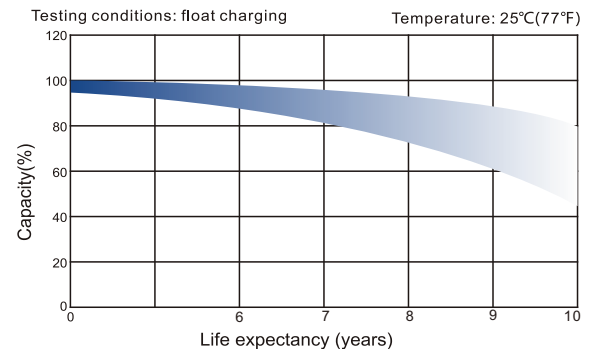

SHENZHEN OFFICE (CHINA)
Tel: +86-755-2691-9474
Fax: +86-755-2691-9474

Recognized under CE/IEC and certified by ISO9001,14001

